

CyTurn



NC SWIVEL ROTARY TABLES

COMPONENTS EXCELLENCE



MADE IN GERMANY





PROCESS STABLE
RELIABLE
DYNAMIC
STRONG

DYNAMIC MEETS PRECISION

The new two axis rotary tables with synchronous drives for high dynamic applications are the result of long-term experience gained in the conception and design of torque motors produced by CYTEC Zylindertechnik GmbH.

CYTEC optimized them once more as latest generation of direct drives for rotating and swivel axes.

Distinctive characteristics of the series are performance, precision and a high amount of reliability together with enormous power and dynamic. The advantages benefit not only ambitious machining operation, but especially the high speed-turning up to 1.000 rpm.


The drives are characterized by optimal control properties, a high overload capacity and so adapt ideally to most application requirements.

The powerful drive clamping device supports high precise positioning even for rough machining and high workpiece loads.



CYTEC Zylindertechnik GmbH is a proven system partner for the mechanical engineering experience, technical know-how and creativity gained over decades working in the machine tool industry.

The range of products comprises hydraulic and pneumatic clamping systems with positive lock, motor spindles, multiple axis NC milling heads and not least one- or two-axis rotary tables with ultra-high dynamic, patented direct drives. CYTEC Zylindertechnik GmbH is developer and producer of tool machine components, that meet highest technical demands. Its in-house production depth and flexibility guarantee highest product quality.

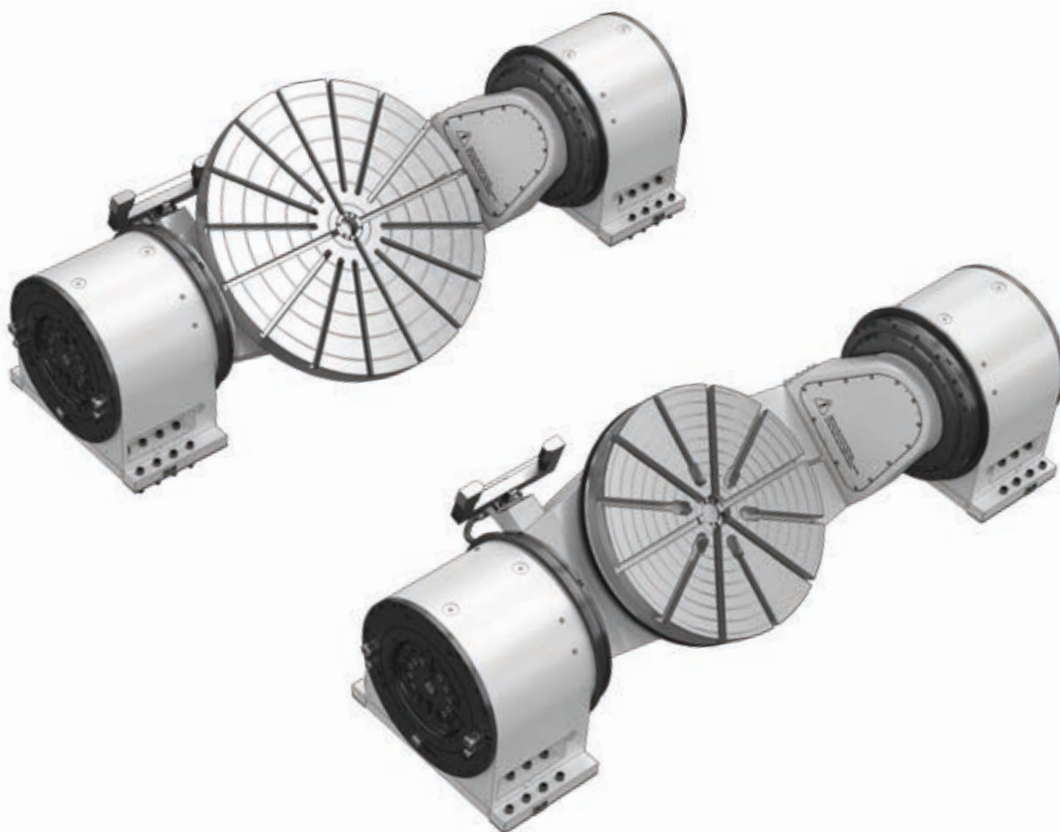

AT A GLANCE

● Motor configuration

- 3 different HighTorque drives in the swivel axis for various workpiece weights
- 2 different HighTorque/HighSpeed drives in the rotative axis, for high precise positioning tasks or optionally for turn-mill purposes.

● Integrated security pack

in terms of a complete sensor system for total monitoring of all functions during the operational process

● UltraHighTorque direct drives of the latest generation for maximised performance and dynamic

Sophisticated coil arrangement and curved magnets - provide performance concentration with best acceleration values and dynamic.


● Highest possible precision

by means of

- radial/axial roller bearings
- state-of-the-art measuring systems
- torsional stiffness of the structure




New coil concept, curved magnets



Option tool measuring



Standard and optional face plates

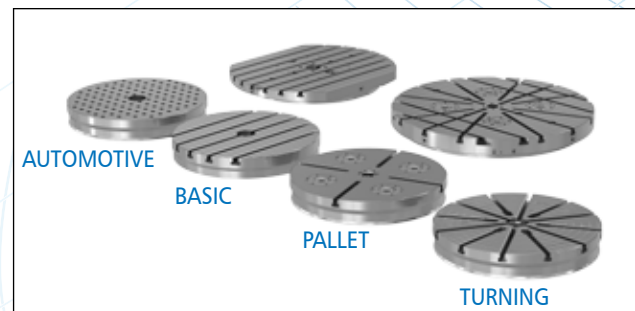

- **Capsuled motor housings**

as reliable protection device from harmful external influences and dirt

- **High system rigidity**


as a result of extensive FEM calculation:

- simulation of various stress situations caused by different loads and machining processes
- optimised weight-reduced structure
- for best machining quality and trouble free operation

- **Optional table face plates**

for various requirements;
sizes/adaption/design available according to customer demands, possible with:

- integrated pallet/zero point clamping systems
- central rotary junction for transmission of clamping hydraulics

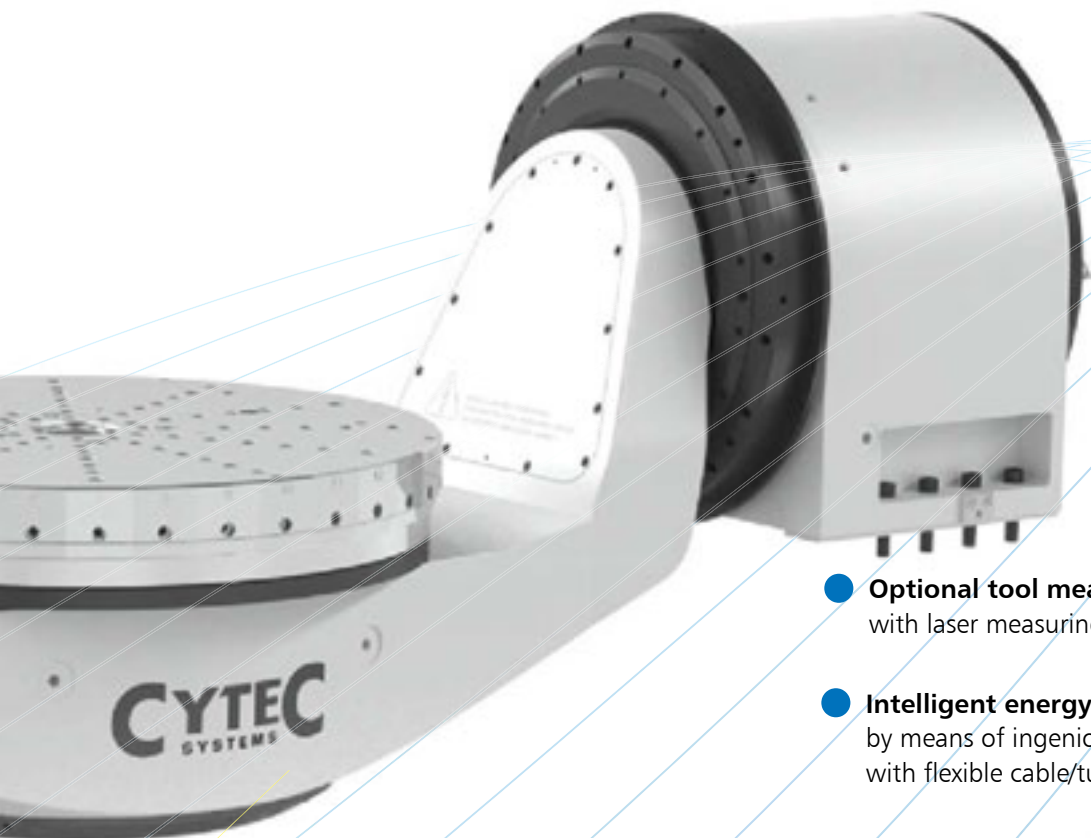


- **Optional tool measuring**

with laser measuring module


- **Intelligent energy line concept**

by means of ingenious revolving supply system with flexible cable/tube arrangement

Integrated monitoring/security pack




FEM optimised overall structure



Protected motor housing




Option: integrated zero point-/pallet clamping system



MODULAR DRIVE PACKAGE


Swivel axis A	Option "light"	Option "medium"	Option "heavy"
Torque S1 [Nm]:	2.290	3.620	4.246
Torque max. [Nm]:	4.780	5.720	6.654
Speed max. [min ⁻¹]:	80	80	80
Max. load weight [kg]:	500	750	1.000

For each application the appropriate drive concept can be configured: for the swivel axis three strong HighTorque drives are available (light, medium, heavy for load weights from 500 up to 1.000 kg), and two rotary drives for various machining purposes. For the rotary axis you can select either a high dynamic positioning unit or a high-speed module (up to 1.000 rpm) for mill-turning applications.

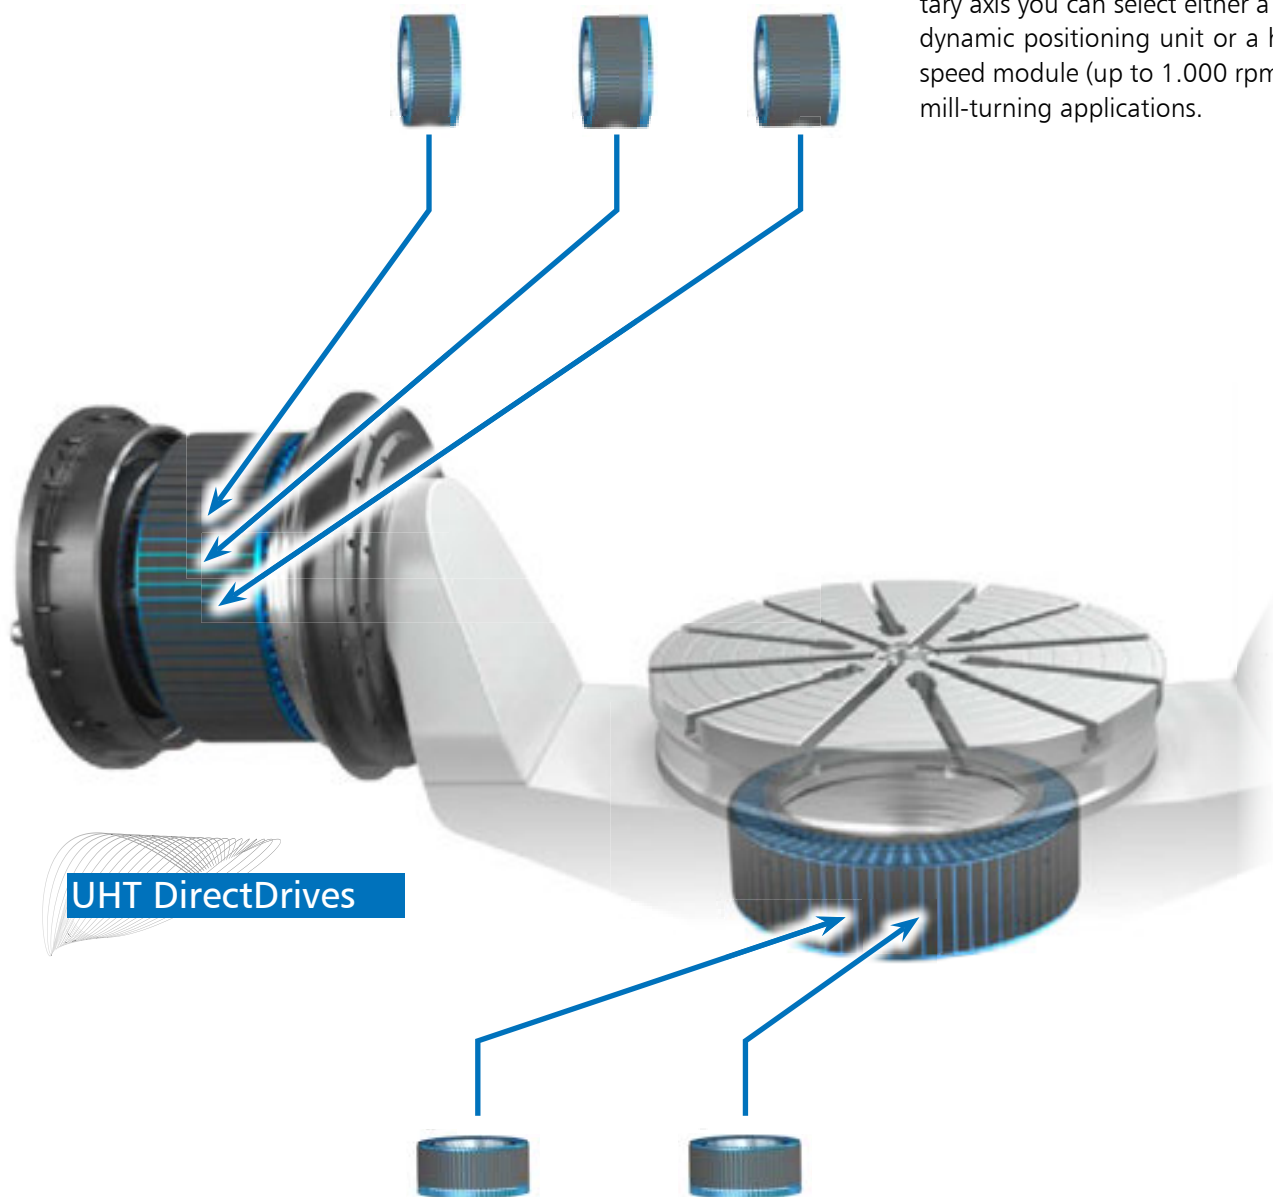


Rotary axis C	Option "mill"	Option "mill-turn"
Torque S1 [Nm]:	1.180	860
Torque max. [Nm]:	1.930	1.390
Speed max. [min ⁻¹]:	105	1.000

INTERFACES

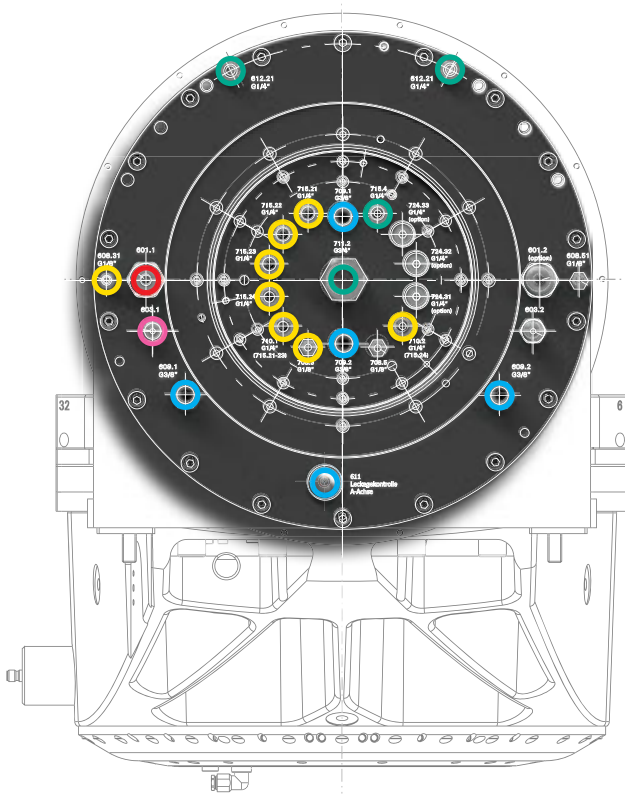

Supply connections on the left drive of the swivel axis (A axis)

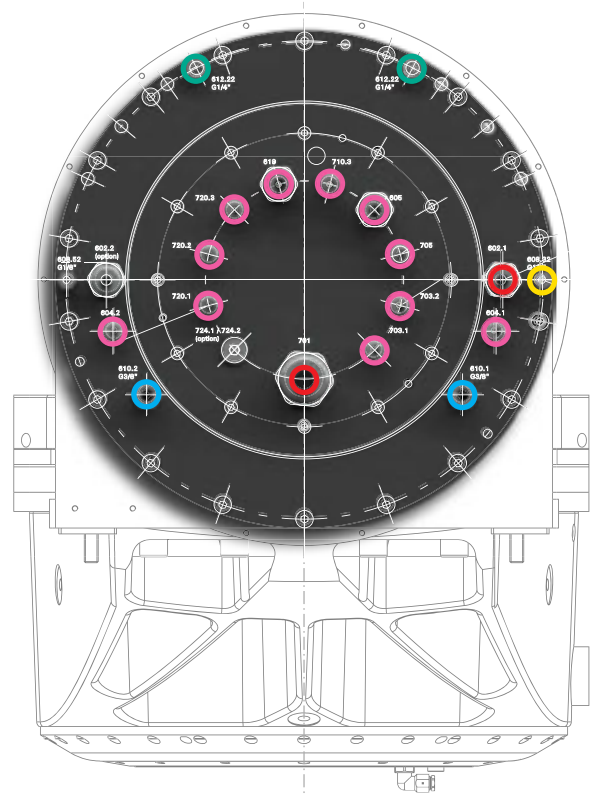

Supply connections on the right drive of the swivel axis (A axis)

Power connections:

- Motors swivel axis (A axis)
- Motor rotary axis (C axis)

Sensor ports:

- Temperature monitoring
- Vibration monitoring
- Angular measuring devices
- Tool measuring unit
- Leakage

Hydraulic ports:

- Tool clamping system
- Axis clamping


Pneumatic ports:

- Blocking air axes
- Blocking air/compressed air tool measuring

Cooling ports:


- Motors swivel axis (A axis)
- Motor rotary axis (C axis)

COMPACT DESIGN

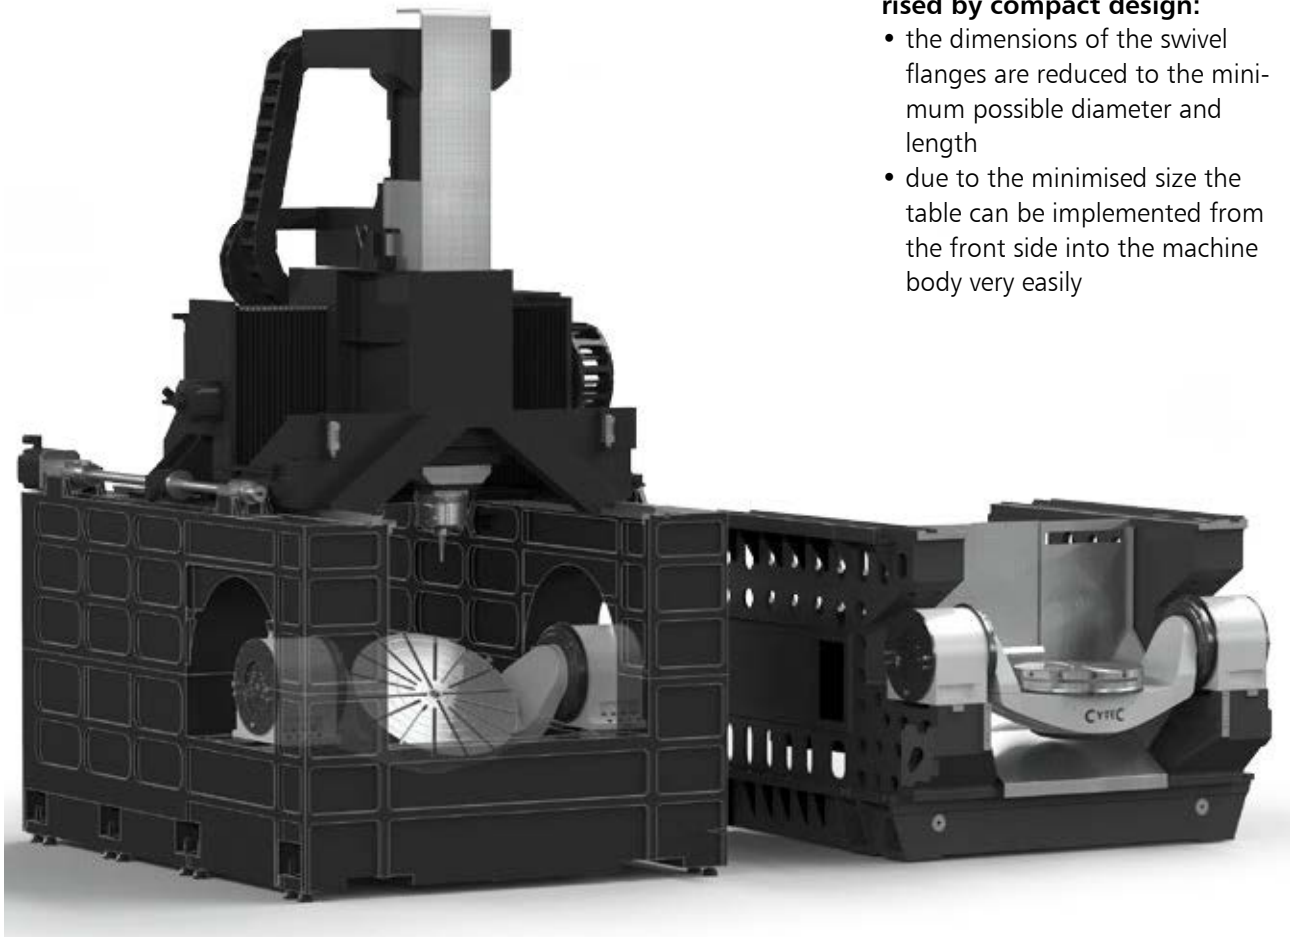

The rotary table is characterised by compact design:

- the dimensions of the swivel flanges are reduced to the minimum possible diameter and length
- due to the minimised size the table can be implemented from the front side into the machine body very easily

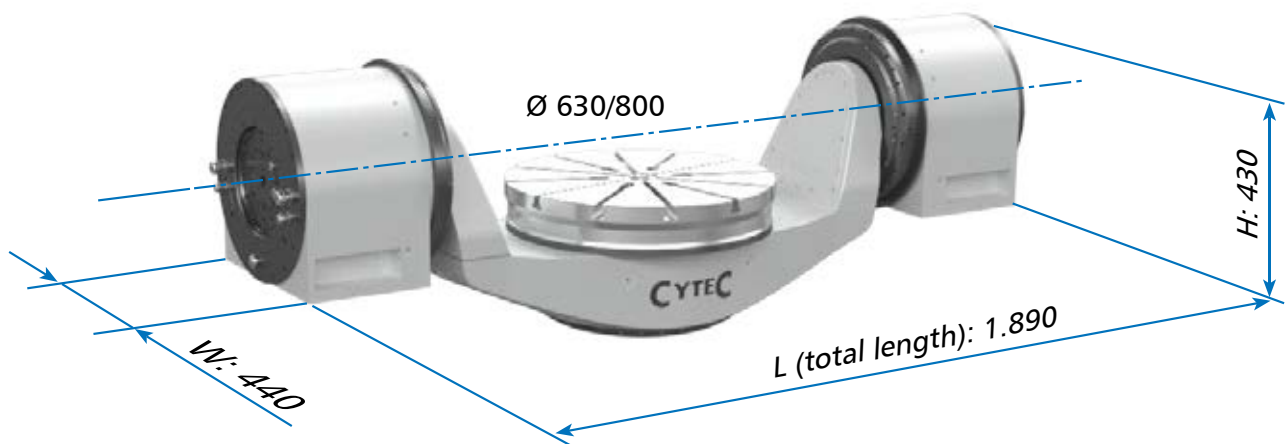

APPLICATION EXAMPLES




High speed mill/turning operation


The high dynamic rigidity, combined with compact design and high capacity drives enable various dynamic high speed cutting processes. Heavy cutting and rough machining under high loads is an important feature of this new generation of rotary tables.



Dynamic positioning: Machining of aircraft turbine element

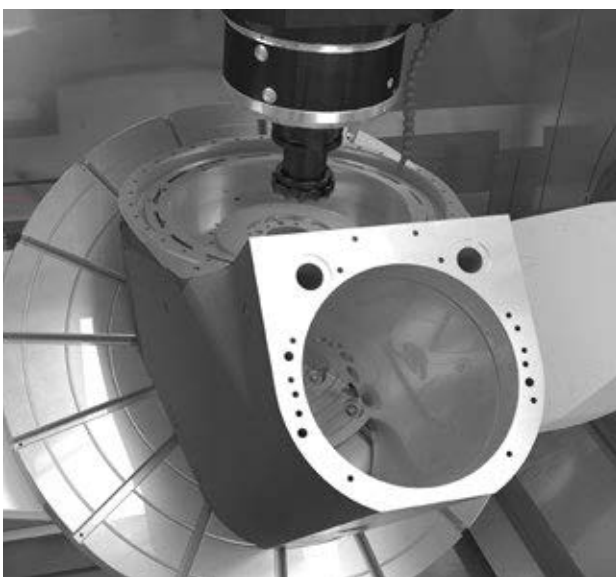


Heavy cutting example

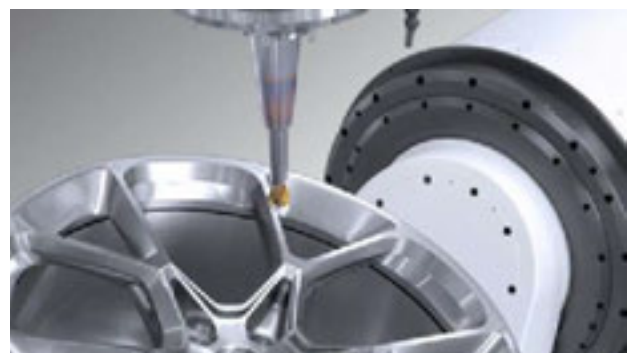

High speed surface finishing (aluminium car rim)


The Allrounder: CRT/630/800 HV

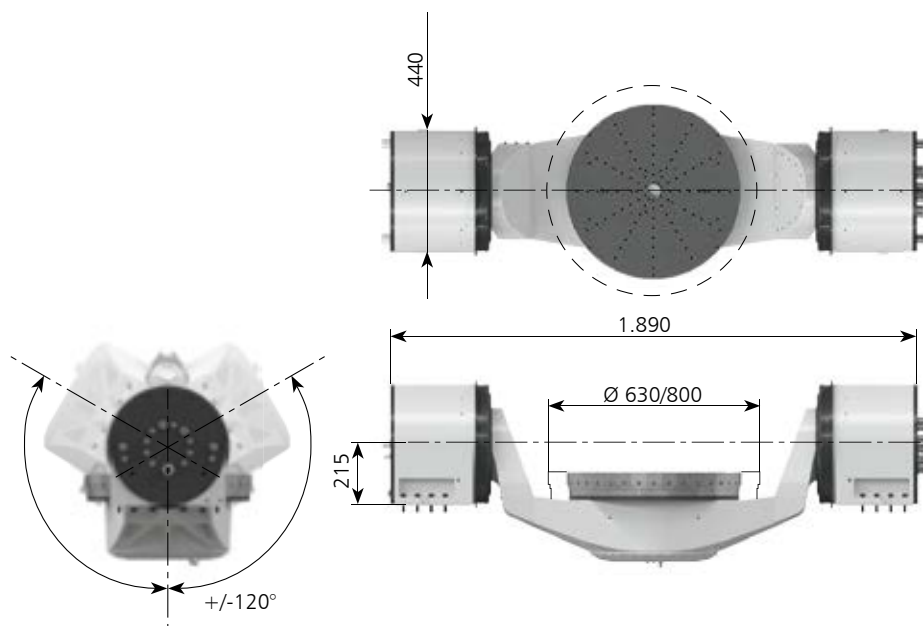

Series	CRT/630/800 HV				
	Rotary axis C		Swivel axis A		
Motor type*:	UHT "Mill"	HS "MillTurn"	UHT "light"	UHT "medium"	UHT "heavy"
Cont. torque S1 [Nm]:	1.180	860	2.990	3.620	4.246
Pulse torque [Nm]:	1.930	1.390	4.780	5.720	6.654
Clamping torque [Nm]:	2.800 (6 bar)		5.640		
Speed max. [min ⁻¹]:	105	1.000	80		
Ang. measuring system:	Heidenhain RCN 2380				
Positioning accuracy:	± 5"				
Ø Face plate [mm]:	630 / 800		-		
Max. load [kg]:	(500 - 1.000)		500	750	1.000
Power dissipation [kW]:	2,8	2,6	7,0	8,4	9,7
Total weight [kg]:	-		1.280	1.305	1.330

*: **UHT**: ultra high torque, for positioning function; **HS**: high speed for fast rotation function

The Alternative in XL: CRT/1200 HV

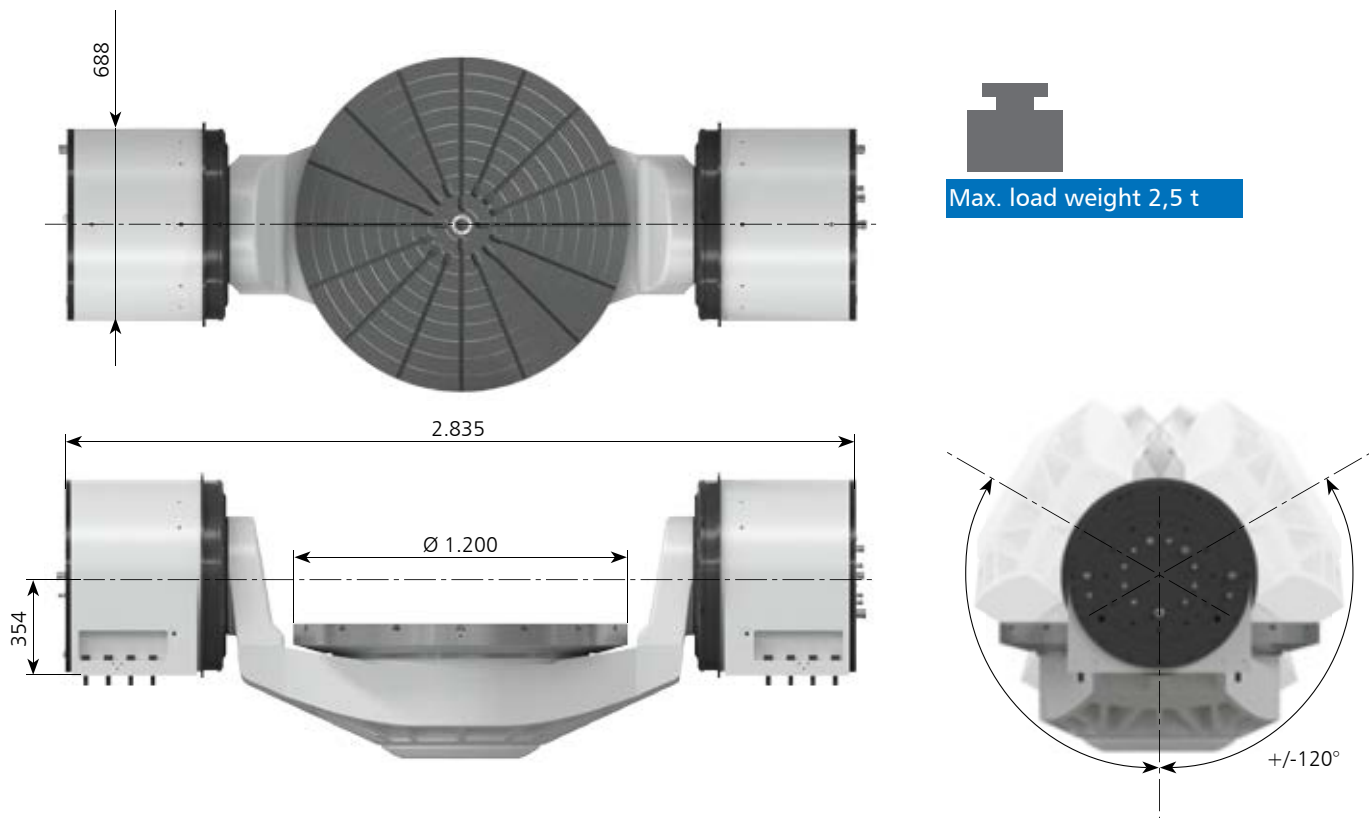

Series	CRT/1200 HV	
	Rotary axis C	Swivel axis A
Motor type*:	UHT	UHT
Cont. torque S1 [Nm]:	2.830	8.744
Pulse torque [Nm]:	5.235	16.288
Clamping torque [Nm]:	10.000 (60 bar)	26.000 (60 bar)
Speed max. [min ⁻¹]:	66	40
Ang. measuring system:	Heidenhain RCN 2380	
Positioning accuracy:	± 5"	
Ø Face plate [mm]:	1.200	-
Max. load [kg]:	2.500	
Power dissipation [kW]:	12,5	
Total weight [kg]:	4.300	

*: **UHT**: ultra high torque, for positioning function; **HS**: high speed for fast rotation function

CYTEC WORLD WIDE



● **CYTEC Zylindertechnik GmbH**
Steffensrott 1 • D - 52428 Jülich
Tel.: (+49) 02461/6808-0
Fax.: (+49) 02461/6808-758
Mail: CYTECtrade@CYTEC.de

● **Sales department**
CYTEC Zylindertechnik GmbH
 Carl-Zeiss-Str. 7
 D- 72124 Pliezhausen
 Tel.: (+49) 7127/811 880
 Fax.: (+49) 7127/811 885
 Mail: CYTECtrade@CYTEC.de

● **Great Britain**
CYTEC Systems UK Ltd.
 Unit H • 100 Shaw Road
 (Off Daltry Str.)
 GB- Oldham, OL1 4AB
 Tel.: (+44) 0161/678 70 90
 Fax.: (+44) 0161/620 53 92
 Mail: sales@CYTEC-uk.com
 Web: www.CYTECsystems-uk.com

● **France**
CYTEC Systems SARL
 Parc des Erables
 66 route de Sartrouville
 F- 78230 Le Pecq
 Tel.: (+33) 01 30 87 13 50
 Fax.: (+33) 01 30 87 13 51
 Mail: sales@CYTEC-fr.com
 Web: www.CYTEC-systems.fr

● **Portugal**
Nelson S. Bernardo Lda
 No 3, Loja 17
 Rua Fonte Cabeco d'El Rey
 2400-719 Leiria
 Tel.: (+351) 244 691 446
 Fax.: (+351) 244 695 166
 Mail: geral@nsb.pt
 Web: www.nsb.pt

● **Italy**
Emanuele Mascherpa S.p.A.
 Via Natale Battaglia, 39
 I- 20127 Milano
 Tel.: (+39) 02/280031
 Fax.: (+39) 02/2829945
 Mail: postmaster@mascherpa.it
 Web: www.mascherpa.it

● **Czech Republic**
KJ-tech
 S.R.O. Vilová 350460
 10 Liberec 10
 Tel.: (+420) 486141688
 Fax.: (+420) 485150130
 Web: www.kjtech.cz

● **Switzerland**
Geiger CYTEC Systems AG
 Steinhäusstraße 40
 CH-3150 Schwarzenburg
 Tel.: (+41) 31 734 24 24
 Fax.: (+41) 31 734 24 25
 Mail: info@geigerCYTEC.com

● **Hungary**
Working KFT
 Budai Nagy Antal út 8
 HU-2400 Donauújváros
 Tel.: (+36) 25 513 300
 Mail: workingkft@invitel.hu

● **USA**
CYTEC Systems USA
 Tel.: 833-CYTECUS
 Mail: info@CYTEC-systems.com
 Web: www.CYTEC-systems.com

● **Eastern & Central USA**
K&A Engineering, LLC
 Port Saint Lucie, FL 34986
 Tel.: (+1) 772.485.0822
 Mail: sales@kandaengineering.com
 Web: www.kandaengineering.com

● **Western USA**
CNC Matters
 2871 E via martens
 Anaheim, CA 92806
 Tel.: (+1) 855.426.2435
 Mail: cncmatters@gmail.com
 Web: www.cncmatters.com

● **Central & South America**
K&A Ingeniería CA
 Ofic 01-04.CC Quisqueya
 Calle Las Flores c/Rondon
 Cagua, Aragua - Venezuela
 Tel.: (+58) 414 395 6238
 Mail: ventas@kandaengineering.com
 Web: www.kandaengineering.com

● **Brazil**
Schütte Brasil
 Máquinas e Equipamentos
 Avenida Indianópolis
 3220 Indianópolis
 04062-003 São Paulo-SP
 Tel.: (+55) 11 5071-1808
 Mail: schutte.brasil@schuttebrasil.com

● **China**
CYTEC Systems China Ltd.
 301-2-10, Yilong International
 community 3, Changyuan,
 453400 Xinxiang, Henan
 Tel.: (+86) 373/8821619
 Fax.: (+86) 373/8821619
 Web: www.CYTEC.cn

● **Taiwan**
Easymore Industrial Co., Ltd.
 No. 284, Daye Rd., Nantun Dist.
 Taichung City 40848, Taiwan
 Gyeonggi-do, Korea
 Tel.: (+886) 4 2310 0909
 Fax.: (+886) 4 2328 7433
 Mail: info@easymore.com.tw
 Web: www.easymore.com.tw



CYTEC Zylindertechnik GmbH
Steffensrott 1 • D-52428 Jülich • Tel.: (+49) 2461 / 6808-0 • Fax: (+49) 2461 / 6808-758
E-mail: info@cytec.de • http:// www.cytec.de • www.cytec.blog